


205.

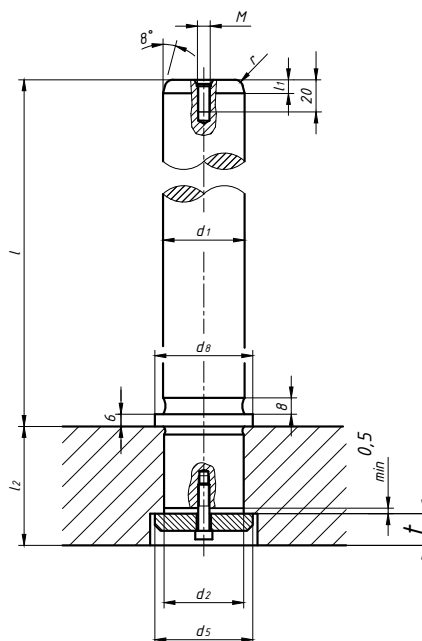

MATERIAL	HARDNESS	DEPTH	SURFACE
Production Steel	60 ± 2 HRC Hardened by induction.	1,5 mm	Very finely ground with precision.

205.								
d1h3	l1	l2	d2	d8	d5	t	M	Order Code
24	125	32	24	31,5	32	11	M6x20	205.24.125
	160	32	24	31,5	32	11	M6x20	205.24.160
	200	32	24	31,5	32	11	M6x20	205.24.200
	220	32	24	31,5	32	11	M6x20	205.24.220
	240	32	24	31,5	32	11	M6x20	205.24.240
25	125	32	25	31,5	32	11	M6x20	205.25.125
	160	32	25	31,5	32	11	M6x20	205.25.160
	200	32	25	31,5	32	11	M6x20	205.25.200
	220	32	25	31,5	32	11	M6x20	205.25.220
	240	32	25	31,5	32	11	M6x20	205.25.240
30	125	36	30	39,5	40	14	M8x25	205.30.125
	160	36	30	39,5	40	14	M8x25	205.30.160
	200	36	30	39,5	40	14	M8x25	205.30.200
	220	36	30	39,5	40	14	M8x25	205.30.220
	240	36	30	39,5	40	14	M8x25	205.30.240
32	125	36	32	39,5	40	14	M8x25	205.32.125
	160	36	32	39,5	40	14	M8x25	205.32.160
	200	36	32	39,5	40	14	M8x25	205.32.200
	220	36	32	39,5	40	14	M8x25	205.32.220
	240	36	32	39,5	40	14	M8x25	205.32.240
	260	36	32	39,5	40	14	M8x25	205.32.260
	280	36	32	39,5	40	14	M8x25	205.32.280

205.								
d1h3	l1	l2	d2	d8	d5	t	M	Order Code
38	160	40	40	56	50	15	M8x25	205.38.160
	200	40	40	56	50	15	M8x25	205.38.200
	240	40	40	56	50	15	M8x25	205.38.240
	280	40	40	56	50	15	M8x25	205.38.280
	160	40	42	56	50	15	M8x25	205.40.160
40	200	40	42	56	50	15	M8x25	205.40.200
	240	40	42	56	50	15	M8x25	205.40.240
	280	40	42	56	50	15	M8x25	205.40.280
	200	50	50	71	60	15	M10x30	205.48.200
	240	50	50	71	60	18,5	M10x30	205.48.240
48	280	50	50	71	60	18,5	M10x30	205.48.280
	315	50	50	71	60	18,5	M10x30	205.48.315
	200	50	52	71	60	18,5	M10x30	205.50.200
	240	50	52	71	60	18,5	M10x30	205.50.240
	280	50	52	71	60	18,5	M10x30	205.50.280
50	315	50	52	71	60	18,5	M10x30	205.50.315
	200	56	60	80	70	22,5	M10x35	205.60.200
	240	56	60	80	70	22,5	M10x35	205.60.240
	280	56	60	80	70	22,5	M10x35	205.60.280
	315	56	60	80	70	22,5	M10x35	205.60.315
60	350	56	60	80	70	22,5	M10x35	205.60.350
	200	56	63	80	70	22,5	M10x35	205.63.200
	240	56	63	80	70	22,5	M10x35	205.63.240
	280	56	63	80	70	22,5	M10x35	205.63.280
	315	56	63	80	70	22,5	M10x35	205.63.315
63	350	56	63	80	70	22,5	M10x35	205.63.350