


505.

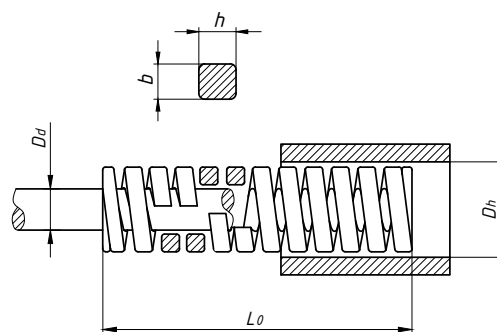

505.

Dh Hole Dia- meter	Dd Rode Dia- meter	L0 Free Length	Catalog No.	Rate	10 %		12 %		15 %		D			
b x h		± %10		3.000.000		1.500.000		Max. Deflection		Block				
mm	mm	mm		N / mm	mm	N	mm	N	mm	N	mm	N		
20	10	38	505.20.038	568,0	3,8	2158	4,6	2613	5,7	3238	8,0	5600		
		44	505.20.044	406,7	4,4	1789	5,3	2155	6,6	2684	11,5	10420		
		51	505.20.051	340,2	5,1	1735	6,1	2075	7,7	2619	14,5	9060		
		64	505.20.064	270,0	6,4	1728	7,7	2079	9,6	2592	17,4	8090		
		76	505.20.076	222,3	7,6	1689	9,1	2022	11,4	2534	23,0	7360		
		89	505.20.089	187,2	8,9	1666	10,7	2003	13,4	2508	24,2	7000		
		102	505.20.102	169,2	10,2	1725	12,2	2064	15,3	2588	30,2	6800		
		115	505.20.115	143,1	11,5	1511	13,8	1974	17,3	2475	34,2	6500		
		127	505.20.127	131,4	12,7	1668	15,2	1997	19,1	2509	40,1	5500		
		152	505.20.152	108,9	15,2	1655	18,2	1982	22,8	2483	44,5	5200		
4,3 x 5,8		305	505.20.305	54,0	30,5	1647	36,6	1976	45,8	2473	-	-		
25	12,5	44	505.25.044	763,0	4,4	3357	5,3	4044	6,6	5036	9,5	10000		
		51	505.25.051	666,0	5,1	3397	6,1	4063	7,7	5128	12,4	9820		
		64	505.25.064	645,0	6,4	4120	7,7	4960	9,6	6180	13,0	8370		
		76	505.25.076	555,0	7,6	4225	9,1	5060	11,4	6336	16,0	8895		
		89	505.25.089	460,0	8,9	4110	10,7	4945	13,4	6166	20,0	9240		
		102	505.25.102	390,0	10,2	3975	12,2	4758	15,3	5965	23,0	8970		
		115	505.25.115	355,0	11,5	4140	13,8	4968	17,3	6210	26,0	9360		
		127	505.25.127	325,0	12,7	4140	15,2	4955	19,1	6211	28,0	9127		
		152	505.25.152	352,0	15,2	3875	18,2	4640	22,8	5814	34,0	8670		
		178	505.25.178	228,0	17,8	4095	21,4	4920	26,7	6140	39,0	8970		
		203	505.25.203	200,0	20,3	4100	24,4	4930	30,5	6150	45,0	9090		
5,5 x 6,8		305	505.25.305	135,0	30,5	4146	36,6	4975	45,8	6220	63,0	8566		
32	16	51	505.32.051	1049,0	5,1	5350	6,1	6399	7,7	8077	11,5	19650		
		64	505.32.064	1075,0	6,4	6890	7,7	8270	9,6	10335	13,0	13995		
		76	505.32.076	875,0	7,6	6640	9,1	7970	11,4	9965	16,0	13985		
		89	505.32.089	720,0	8,9	6420	10,7	7700	13,4	9627	20,0	14425		
		102	505.32.102	622,0	10,2	6325	12,2	7590	15,3	9485	23,0	14260		
		115	505.32.115	558,0	11,5	6440	13,8	7727	17,3	9660	26,0	14560		
		127	505.32.127	495,0	12,7	6297	15,2	7560	19,1	9450	28,0	13885		
		139	505.32.139	364,0	13,9	5060	16,7	6079	20,9	7607	37,0	11250		
		152	505.32.152	405,0	15,2	6200	18,2	7440	22,8	9300	34,0	13870		
		178	505.32.178	351,0	17,8	6280	21,4	7535	26,7	9420	39,0	13760		
		203	505.32.203	302,0	20,3	6170	24,4	7405	30,5	9255	45,0	13680		
		254	505.32.254	245,0	25,4	6175	30,5	7412	38,1	9265	62,0	15075		
		7,4 x 9,0		305	505.32.305	197,0	30,5	5975	36,6	7175	45,8	8965	75,0	14700

505.													
Dh Hole Dia- meter	Dd Rode Dia- meter	L0 Free Length	Catalog No.	Rate ± %10	10 % 3.000.000		12 % 1.500.000		15 % Max. Deflection		D Block		
b x h		mm		N / mm	mm	N	mm	N	mm	N	mm	N	
mm	mm												
40	20	64	505.40.064	1068,0	6,4	6835	7,7	8224	9,6	10253	14,0	13530	
		76	505.40.076	1143,0	7,6	8687	9,1	10401	11,4	13030	20,0	14450	
		89	505.40.089	878,0	8,9	7830	10,7	9415	13,4	11750	20,0	17600	
		102	505.40.102	760,0	10,2	7770	12,2	9295	15,3	11659	23,0	17525	
		115	505.40.115	675,0	11,5	7805	13,8	9370	17,3	11715	26,0	17655	
		127	505.40.127	620,0	12,7	7897	15,2	9455	19,1	11850	28,0	17415	
		139	505.40.139	471,0	13,9	6547	16,7	7866	20,9	9844	38,0	15110	
		152	505.40.152	510,0	15,2	7735	18,2	9265	22,8	11605	36,0	18325	
		178	505.40.178	425,0	17,8	7635	21,4	9181	26,7	11455	43,0	18447	
		203	505.40.203	372,0	20,3	7590	24,4	9125	30,5	11388	49,0	18325	
		254	505.40.254	294,0	25,4	7515	30,5	9028	38,1	11275	62,0	18352	
		8,5 x 10,5	305	505.40.305	245,0	30,5	7530	36,6	9005	45,8	11255	75,0	18450
50	25	76	505.50.076	1693,0	7,6	12869	9,1	15406	11,4	19300	14,0	46710	
		89	505.50.089	1405,0	8,9	12550	10,7	15085	13,4	18825	19,0	26790	
		102	505.50.102	1210,0	10,2	12393	12,2	14823	15,3	18590	22,0	26730	
		115	505.50.115	1075,0	11,5	12375	13,8	14850	17,3	18560	25,0	26905	
		127	505.50.127	965,0	12,7	12295	15,2	14715	19,1	18440	28,0	27105	
		139	505.50.139	822,0	13,9	11426	16,7	13727	20,9	17180	32,0	26430	
		152	505.50.152	804,0	15,2	12251	18,2	14670	22,8	18375	34,0	27400	
		178	505.50.178	695,0	17,8	12425	21,4	14935	26,7	18635	40,0	27920	
		203	505.50.203	610,0	20,3	12425	24,4	14933	30,5	18633	45,0	27542	
		254	505.50.254	470,0	25,4	11990	30,5	14395	38,1	17980	58,0	27375	
		11,7 x 13,3	305	505.50.305	385,0	30,5	11835	36,6	14200	45,8	17750	70,0	27160