



206.

207.

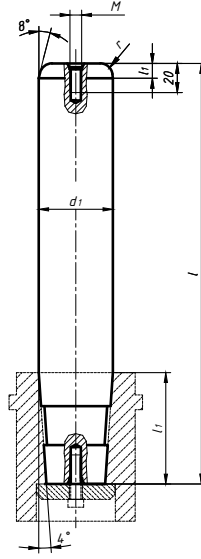

206.



207.

MALZEME

İmalat Çeliği

SERTLİK
 60 ± 2 HRC
İndüksiyon ile sertleştirilmiştir.

DERİNLİK

1,5 mm

YÜZEY

Hassas olarak
çok ince taşlanmıştır.

206.
207.

d1h3	l	l1	M	Sipariş No
24	160	37	M8x25	206.24.160
	200			206.24.200
	225			206.24.225
	250			206.24.250
25	160	37		206.25.160
	200			206.25.200
	225			206.25.225
	250			206.25.250
30	160	45		206.30.160
	200			206.30.200
	225			206.30.225
	250			206.30.250
32	160	45		206.32.160
	200			206.32.200
	225			206.32.225
	250			206.32.250
38	200	50		206.38.200
	225			206.38.225
	250			206.38.250
	315			206.38.315
40	200	50		206.40.200
	225			206.40.225
	250			206.40.250
	315			206.40.315
48	225	55	M10x30	206.48.225
	250			206.48.250
	315			206.48.315
	400			206.48.400
50	225	55		206.50.225
	250			206.50.250
	315			206.50.315
	400			206.50.400

Ød1	24-25	30-32	38-40	48-50
Ød2	40	48	58	70
Ød3	48	54	64	78
Ød4	26	32	40	50
L	52	60	65	73
L1	40	45	50	55
L2	12	15	15	18
L3	37	45	50	55

SİPARİŞ ÖRNEĞİ

Ød1 = 32

207.32